







Lindura wood flooring HD 400 / naturally oiled

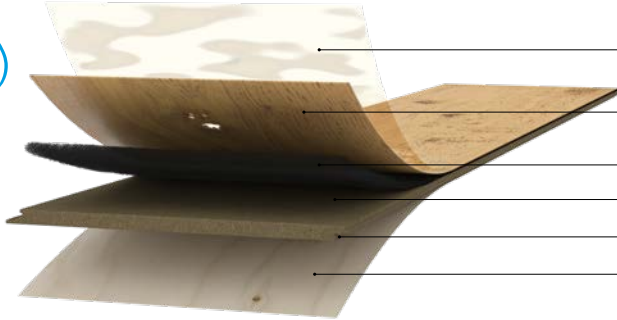

- a. Wearing layer – treated ready for residential use, naturally oiled surface on the basis of renewable resources (waxes and oils)
- b. Real wood covering layer
- c. Wood powder layer
- d. HDF middle layer
- e. AquaStop edge impregnation
- f. Wood powder backing with real wood cover

| Tests | DIN/EN standard | Lindura wood flooring HD 400 / naturally oiled |
|---|-----------------------|---|
| General data on product composition | | |
| Type of covering: | | Flooring panel with top layer made from fine wood |
| Total thickness: | | approx. 11 mm |
| Effective measurement: (length × width) | | 2 200 × 270 mm 2 600 × 320 mm |
| Product structure: | | a. Wearing layer – treated ready for residential use, naturally oiled surface on the basis of renewable resources (waxes and oils) b. Real wood covering layer c. Wood powder layer d. HDF middle layer (approx. 930 kg/m ³ ± 3%) e. AquaStop edge impregnation f. Wood powder backing with real wood cover |
| Technical data | | |
| Locking method: | | Masterclik Plus |
|  Antibacterial surface property: | ISO 22196 | Effectiveness of the antibacterial property against Staphylococcus aureus ATCC 6538P: “significant”, value of the antibacterial effect $2 \leq A < 3$. Effectiveness of the antibacterial property against Escherichia coli ATCC 8739: “strong”, value of the antibacterial effect $A \geq 3$. |
|  Fire behaviour: | EN 13 501 | Bfl-s1 (hardly flammable) |
|  Formaldehyde emissions (E1 = 0.1 ppm): | EN 717-1 | ≤ 0.05 ppm |
|  Content of pentachlorophenol: | CEN/TR 14 823 | ≤ 5 × 10 ⁻⁶ⁿ |
| Indent resistance: (Brinell) | EN 1534 | ≥ 100 N/mm ² (oak) |
| Antislip: | DIN 51 130 BGR 181 | R 10 |
|  Underfloor heating: | | Suitable for hot-water underfloor heating Electrical underfloor heating is generally suitable when it is built into the floor screed or the concrete layer and thus does not lie on the concrete layer as foil heating. The heating elements / pipes / wires must lie across the entire area and not just be partly present. If the area is only partially heated, the floor covering must have expansion joints (system profile strips). The maximum permitted surface temperature is 29 °C. Standard foil heating systems are generally not recommended. One exception is self-regulating heating systems which maintain the 29 °C surface temperature. Floating installations - All woods are suitable – with beech, steamed beech, Canadian maple and European maple open joints may appear on the short sides due to the woods’ naturally strong swelling and shrinking behaviour. |
| Underfloor cooling: | | A separate leaflet is available for laying on cooled floor constructions. |
| Heat transfer resistance: | EN 12 664 | 0.075 (m ² K)/W; with MEISTER-Silence 25 DB: 0.084 (m ² K)/W |

Technical data

| | | |
|---------------------------|--------------------|----------------------------------|
| Thermal conductivity: | EN 12 664 | 0.143 W/(m*K) |
| Footfall noise reduction: | DIN EN ISO 10140-3 | with MEISTER-Silence 25 DB: 16dB |

General data on environment, installation and care

| | | |
|---------------------------------|---|---|
| Blue Angel: | RAL-UZ 176 | awarded |
| Disposal: | Residual pieces can be disposed of in household refuse (e.g. thermal treatment). Dispose large quantities according to municipal provisions (e.g. recycling centres). An energetic utilization in authorized plants is recommended. | |
| Cleaning and care: | Cleaning after completion of construction work/day-to-day cleaning: Dr. Schutz Premium Wood soap Freshening care: Dr. Schutz Premium care oil Special cleaning: Dr. Schutz Deep Clean | |
| Areas of application: | The HD 400 collection is suitable for all living areas with heavy wear as well as for commercial areas with normal wear, e. g. hotel rooms, boutiques etc. The Lindura wood flooring is water-resistant (24 hours protection against standing water). Can be installed in humid rooms like e.g. bathrooms. This does not include outdoor areas and wet rooms, e.g. saunas, shower cubicles, steam rooms and rooms with a floor drain. | |
| Preconditions for installation: | DIN 18 356 | The substrates must be ready for laying on according to the generally recognised rules of the trade taking into account VOB (German construction contract procedures), part C DIN 18 365 "parquetry work". The substrate must be dry (in the case of mineral substrates max. 2 % with anhydrite screed max. 0.5 % residual moisture – measured with CM devices), even, firm and clean. Additionally, any unevenness of 3 mm/per initial metre and 2 mm per further metre must be evened out according to DIN 18 202, table 3, line 4. The installation instructions provided with the product must be observed. |



MeisterWerke Schulte GmbH reserves the right to make alterations to material and structures when this serves to improve the quality.